

Four-Hole Roman Tub Filler Rough-In

FEATURES

- Corrosion resistant
- 1/2" NPSM
- Forged brass body
- For use with GE, GM, GB, and GF four-hole roman tub filler trim

REQUIRED COMPONENTS (Sold Separately)

| Connecting Tube Model | Spread |
|-----------------------|--------------------------------|
| TBN01011U | 7-1/2"~8-1/4" (200 ± 10 mm) |
| TBN01012U | 8-1/4"~9-1/16" (220 ± 10 mm) |
| TBN01013U | 9-1/16"~9-13/16" (240 ± 10 mm) |
| TBN01014U | 9-13/16"~10-5/8" (260 ± 10 mm) |
| TBN01015U | 10-5/8"~11-3/8" (280 ± 10 mm) |
| TBN01016U | 11-3/8"~12-3/16" (300 ± 10 mm) |

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel


Made to Order

- #PN Polished Nickel
- #PFG Polished French Gold
- #PBR Polished Bronze
- #MBL Matte Black

SPECIFICATIONS

| | |
|----------|--|
| Warranty | Lifetime Limited Warranty (Residential Use) One Year (Commercial Use) |
|----------|--|

DIMENSIONS

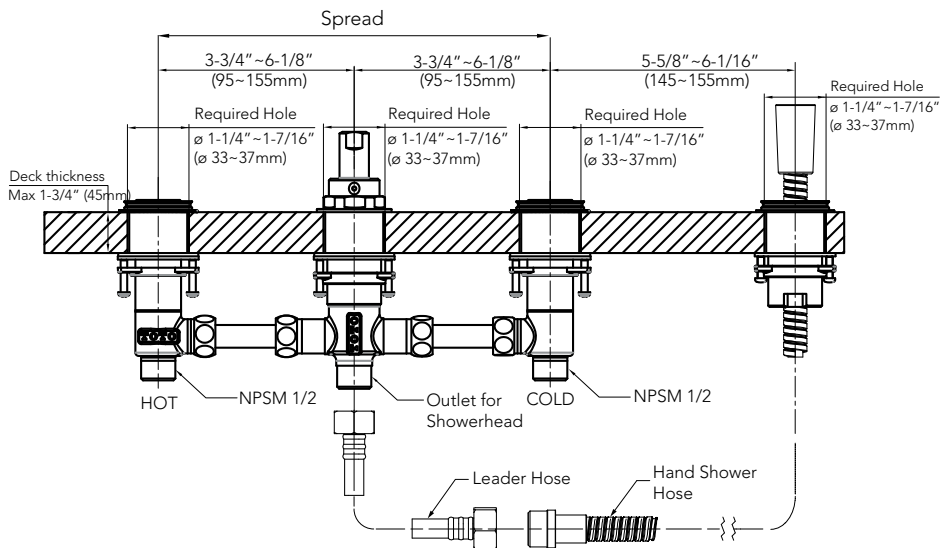

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



INSTALLATION NOTES

- Check local codes for requirements on installing an ASSE 1070/ASME A112.1070/CSA B125.70 compliant device in series with the tub filler
- Connecting tube model is required for installation