

## Drake® Transitional WASHLET®+ S2 Two-Piece Toilet - 1.28 GPF, 10" Rough-In

### FEATURES

- Concealed supply connection for seamless installation
- High-efficiency TORNADO FLUSH® system - 1.28 GPF (4.8 LPF)
- Transitional style tank
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces.
- UNIVERSAL HEIGHT
- Chrome plated trip lever
- 10" Rough-in, supply line sold separately
- Elongated front bowl toilet and tank with WASHLET+ S2 set
- EWATER+® auto-cleans wand after every use
- PREMIST® automatically mists the bowl before each use
- Self-cleaning wand cleans itself inside and out before and after every use
- CLEAN RESIN® keeps wand and seat cleaner, more hygienic, and effortless to maintain
- Convenient arm control panel
- Night light illuminates the inside of the bowl



**TORNADO FLUSH**



**EWATER+**



**CEFIONTECT**



**UNIVERSAL HEIGHT**

### MODELS

- **MW7863346CEFG.10 (#01)**  
With CEFIONTECT ceramic glaze, WASHLET+ S2 with contemporary design
  - **C776CEFGT40.10**  
Elongated bowl with CEFIONTECT
  - **ST786EA**  
Tank and cover only
  - **SW3346**  
WASHLET+ S2

### OPTIONAL COMPONENTS

- **THU808(#01, #03, #11, #12, #51, #BN, #PN, #PB, #RB, #MBL)-A**  
Trip Lever - Cotton, Bone, Colonial White, Sedona Beige, Ebony, Brushed Nickel, Polished Nickel, Polished Brass, Oil Rubbed Bronze, Matte Black

### COLORS/FINISHES

- #01 Cotton

### PRODUCT SPECIFICATION

The two-piece high-efficiency TORNADO FLUSH toilet shall be 1.28 GPF (4.8 LPF). UNIVERSAL HEIGHT Toilet with CEFIONTECT glaze finish. Toilet shall be 10" rough-in, elongated front bowl and chrome trip lever. Toilet shall be TOTO Model MW7863346CEFG.10#01.

**See SW3346 Specification Sheet for details on included WASHLET.**

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO (cUPC®), EPA WaterSense®, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- ADA compliant for residential use when installed with trip lever located on the approach side
- Complies with CA Prop 65 warning requirements



# MW7863346CEFG.10

## Drake® Transitional WASHLET®+ S2 Two-Piece Toilet - 1.28 GPF, 10" Rough-In

### SPECIFICATIONS


|                            |                                                                                                                                                                              |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Water Use</b>           | 1.28 GPF (4.8 LPF)                                                                                                                                                           |
| <b>Flush System</b>        | TORNADO FLUSH®                                                                                                                                                               |
| <b>Min. Water Pressure</b> | 8 psi (Flowing)                                                                                                                                                              |
| <b>Water Surface</b>       | 9" x 6-7/8"                                                                                                                                                                  |
| <b>Trap Diameter</b>       | 2-1/8"                                                                                                                                                                       |
| <b>Rough-in</b>            | 10"                                                                                                                                                                          |
| <b>Trap Seal</b>           | 2-1/8"                                                                                                                                                                       |
| <b>Warranty</b>            | One Year Limited Warranty                                                                                                                                                    |
| <b>Material</b>            | Vitreous China                                                                                                                                                               |
| <b>Shipping Weight</b>     | <b>C776CEFGT40.10:</b> 62 lbs<br><b>ST786EA:</b> 34 lbs<br><b>SW3346:</b> 16 lbs                                                                                             |
| <b>Shipping Dimensions</b> | <b>C776CEFGT40.10</b><br>30-1/8" L x 15-1/4" W1 x 10-7/8" W2 x 17-3/4" H<br><b>ST786EA</b><br>20" L x 9-3/8" W x 15-5/8" H<br><b>SW3346</b><br>24-3/8" L x 21" W x 7-7/16" H |

See SW3346 Specification Sheet for details on included WASHLET.

### INSTALLATION NOTES

#### Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

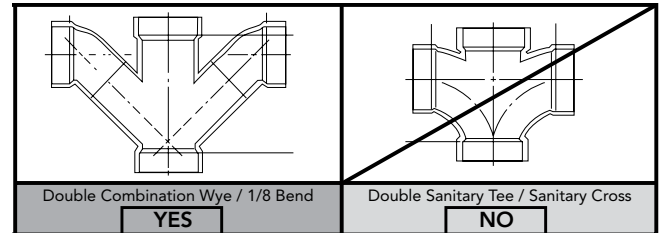


To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 10" rough-in distance.

### DIMENSIONS

\*\*GFCI outlet of 120V, 15A

Washlet power cord is 4' long with 3 prongs.

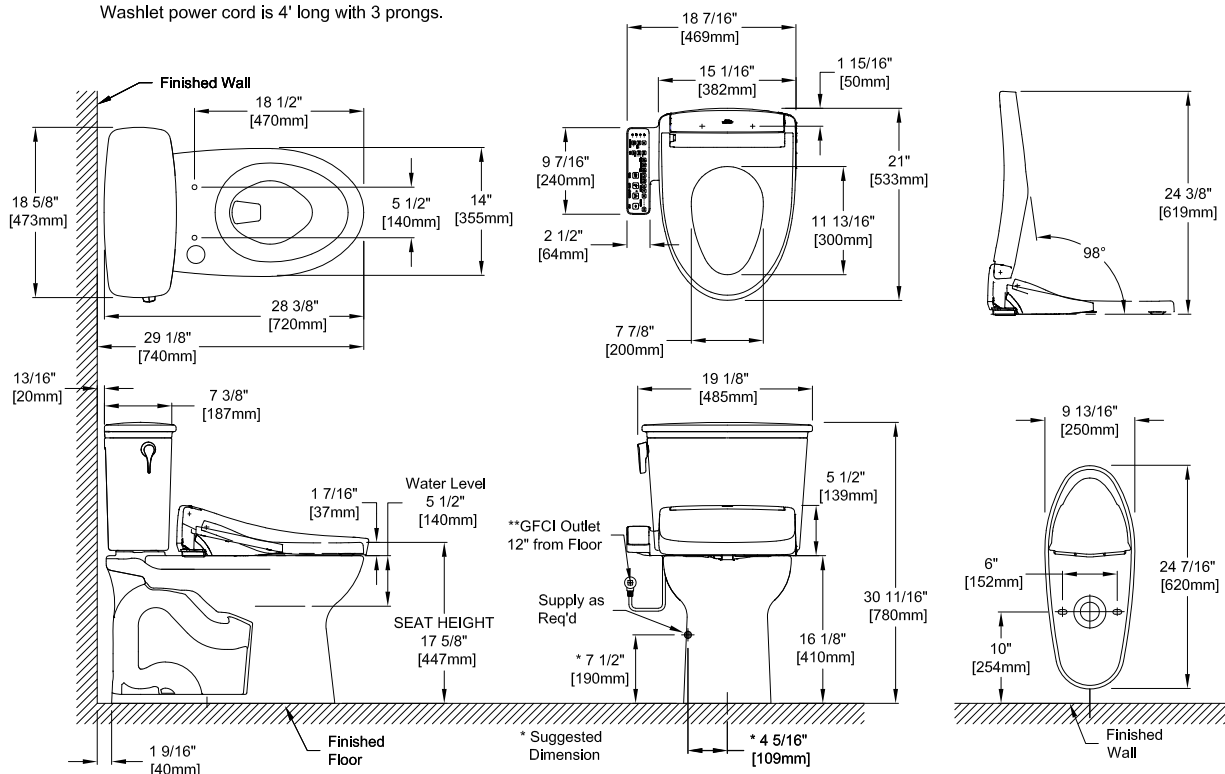

**TOTO®**

These dimensions and specifications are subject to change without notice